

ELS-ME – Flexible connection


Accessories for Unobox-ME

Connection with frame made of galvanized sheet steel. Flexible middle section made of PU coated fibre glass cloth with a temperature range up to 180°C.



Technical Data:

Dimensions:

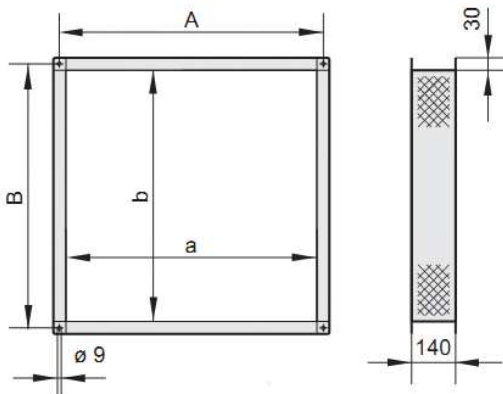

Size	Connection side	ELS-ME Art.-No.	a	b	A	B	Weight [kg]
ME 50-355	Pressure side	ELS500-0004T	360	180	398	218	2,4
ME 50-355	Inlet side	ELS500-0006T	360	360	398	398	3,3
ME 67-400+450	Pressure side	ELS670-0004T	530	220	568	258	2,4
ME 67-400+450	Inlet side	ELS670-0005T	450	450	488	488	3,4
ME 80-500/560/630	Pressure side	ELS800-0004T	660	300	698	338	4,0
ME 80-500/560/630	Inlet side	ELS800-0005T	580	580	618	618	4,0
ME 102-630	Pressure side	ELS100-0004T	880	360	918	398	4,4
ME 102-630	Inlet side	ELS100-0005T	750	750	788	788	4,8

Scope of delivery:

- Flexible connection (ELS-ME)