




Type: **UNO 102-710-G.6NA Gen3**

Open-loop control, 0-10 Volt

Part no.: F15-71014



**Curve:**

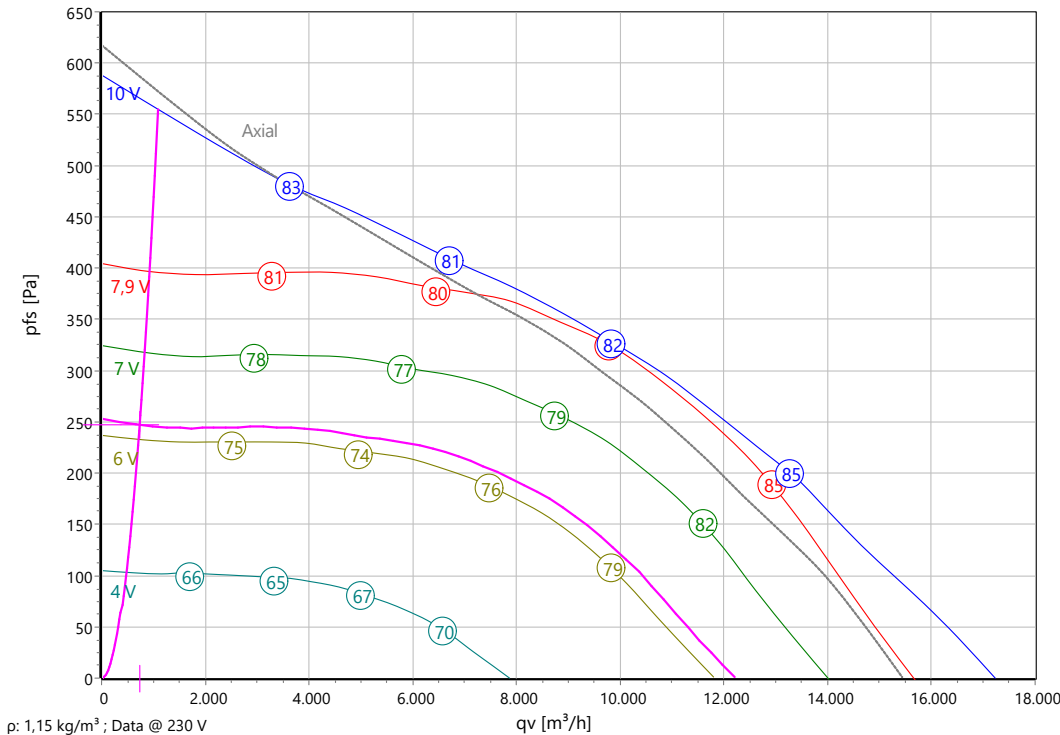

p: 1,15 kg/m³ ; Data @ 230 V

**ErP-Data:**

(EU) Nr. 1253/2014	(Lot6)
q <sub>v</sub>	12733 m³/h
p <sub>fs</sub>	449 Pa
η <sub>fs</sub>	59,9 %
P <sub>ed</sub>	2,66 kW
n	940 r/min
N	54
v	2,18 m/s
η <sub>fs</sub> Lot11	62,9 %

**Operating Point:**

q <sub>v</sub>	735 m³/h
p <sub>fs</sub>	248 Pa
p <sub>fd</sub>	1 Pa
η <sub>ed,fs</sub>	17 %
η <sub>ed,tot</sub>	17 %
P <sub>ed</sub>	0,297 kW
I	1 A
n	610 r/min
L <sub>WA A,OUT</sub>	76 dB(A)
U <sub>c</sub>	6,2 V
v	0,126 m/s
SFP	1456 Ws/m³
FEI	1,0
t <sub>R,OP</sub>	60 °C

**Intersections:**

Curve	q <sub>v</sub> [m³/h]	p <sub>fs</sub> [Pa]	P <sub>ed</sub> [kW]	I [A]	n <sub>N</sub> [r/min]	L <sub>WA A,OUT</sub> [dB(A)]
10 V	1099	555	0,94	2,57	912	85
7,9 V	928,9	397	0,578	1,63	773	81
7 V	831,8	318	0,408	1,23	691	79
6 V	712,2	233	0,273	0,95	592	75
4 V	474	104	0,095	0,5	395	66

**Nominal Data:**

U [V]	f [Hz]	Data @ [V]	P <sub>ed</sub> [kW]	I <sub>N</sub> [A]	n <sub>N</sub> [r/min]	t <sub>R</sub> [°C]	k <sub>10</sub> [m²s/h]	Eff.-Rating	IP	m [kg]
3~200-240	50/60	230	1,5	4	777	-25 .. +60	408	IE5	IP 54	121

**Sound Data:**

Frequency	Σ	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Distances	1 m	4 m
L <sub>wA(A,in)</sub> [dB(A)]	73	-	60	64	66	68	66	61	L <sub>pA(A,in)</sub> [dB(A)]	66	55
L <sub>wA(A,out)</sub> [dB(A)]	76	-	61	67	69	72	68	63	L <sub>pA(A,out)</sub> [dB(A)]	69	58
L <sub>wA(D,cas)</sub> [dB(A)]	62	-	58	57	52	51	50	46	L <sub>pA(D,cas)</sub> [dB(A)]	55	44


performance curve at radial air flow



Type: **UNO 102-710-G.6NA Gen3**

Open-loop control, 0-10 Volt

Part no.: F15-71014

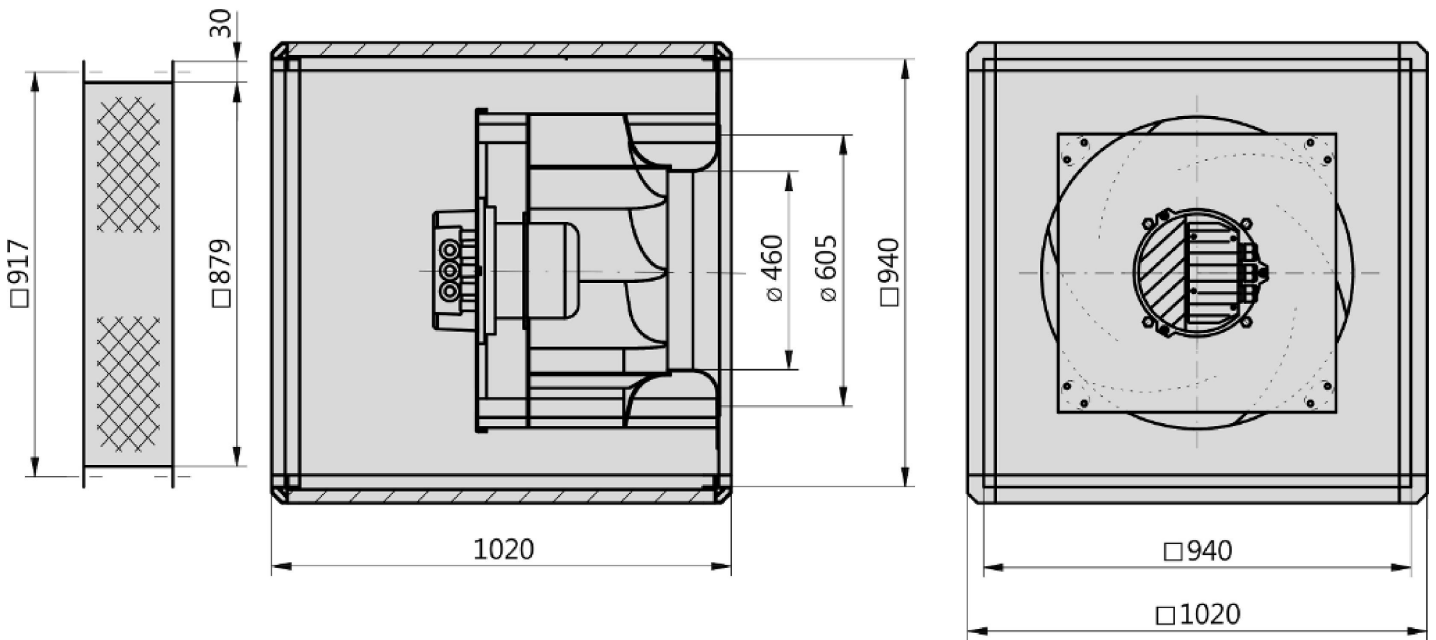




Type: **UNO 102-710-G.6NA Gen3**

Open-loop control, 0-10 Volt

Part no.: F15-71014

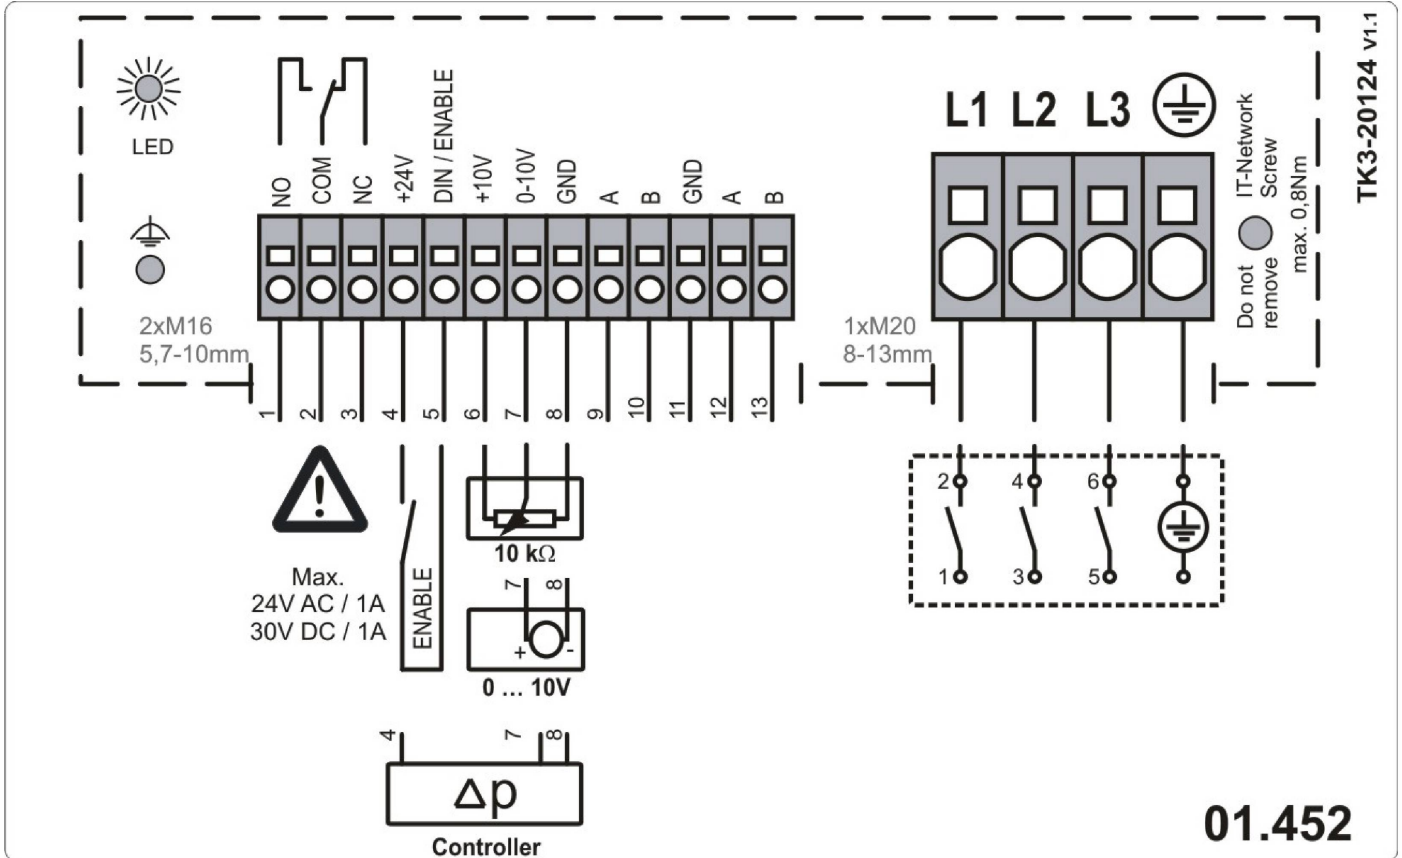

### Unobox

Boxfan with flexible outlet

The housing supporting frames are double chamber aluminium profiles with corners made of plastic and double skinned galvanized steel panels insulated with non-inflammable, noise and temperature insulating fiberglass mats. One side of the casing is open as standard. Wall thickness 20mm,  $K=1,25 \text{ W/m}^2\text{K}$ . As standard, the casing is open opposite to the inlet side. The removable side panels ensure highest possible flexibility of the air flow direction at the installation site. Impeller made of aluminum (AlMg3) with 8 backward curved blades. Compact and flexible design. Energy saving EC external-rotor motor of the 3rd generation. Exceeds in accordance with IEC 60034 -30-2 minimum requirements for IE5 (Ultra Premium Efficiency). Maintenance free ball bearings, closed on both sides with long-term lubrication. Magnets without rare earth elements. Motor made of die casted aluminum. Protection Class IP54 and insulation class F. Electronic with integrated terminal box and environmental resistant cable glands (2x M16 and 1x M20). Status LED integrated. 100% speed controllable with integrated Motor Protection and Soft Start. ModBus RTU Interface integrated. Busconfiguration possible on site by customer. Potential-free Alarm Contact and integrated 24V Supply for accessories. Applicable in all common energy grids and IT-Network. Low noise commutation. Motorized Impeller statically and dynamically balanced according to DIN ISO 21940 -11 at least with quality level G6.3. Air volume control is possible over an 0-10V Signal (accessory).

Fan complies with the guidelines required (Machinery -, EMC- and Low Voltage Directive) to comply with installation and conformity declaration as well as CE marking.

### Operating Point Data:

Airflow

735 m<sup>3</sup>/h

ext. Pressure

248 Pa

Input power

0,297 kW

Current

1 A

Speed

610 r/min

Sound power level

76 Lw(A)

Medium temperature

60 °C

### Nominal Data:

Voltage

3~200-240 V

Frequency

50/60 Hz

Input power

1,5 kW

Current

4 A

Speed

777 r/min

Medium temperature

60 °C

Protection Mode

IP 54  
Efficiency Class  
IE5  
K-Factor  
408  
Weight  
121 kg  
Dimensions  
1020 mm / 1020 mm / 1020 mm

**Contact:**

Rosenberg Ventilatoren BV  
Elandlaan 8  
NL - 3734 CP Den Dolder  
<http://www.rosenberg.nl>

**Type:**

UNO 102-710-G.6NA Gen3

**Article-No.:**

F15-71014