




Type: **UNO 102-710-G.6NA Gen3**

Open-loop control, 0-10 Volt

Part no.: F15-71014



**Curve:**

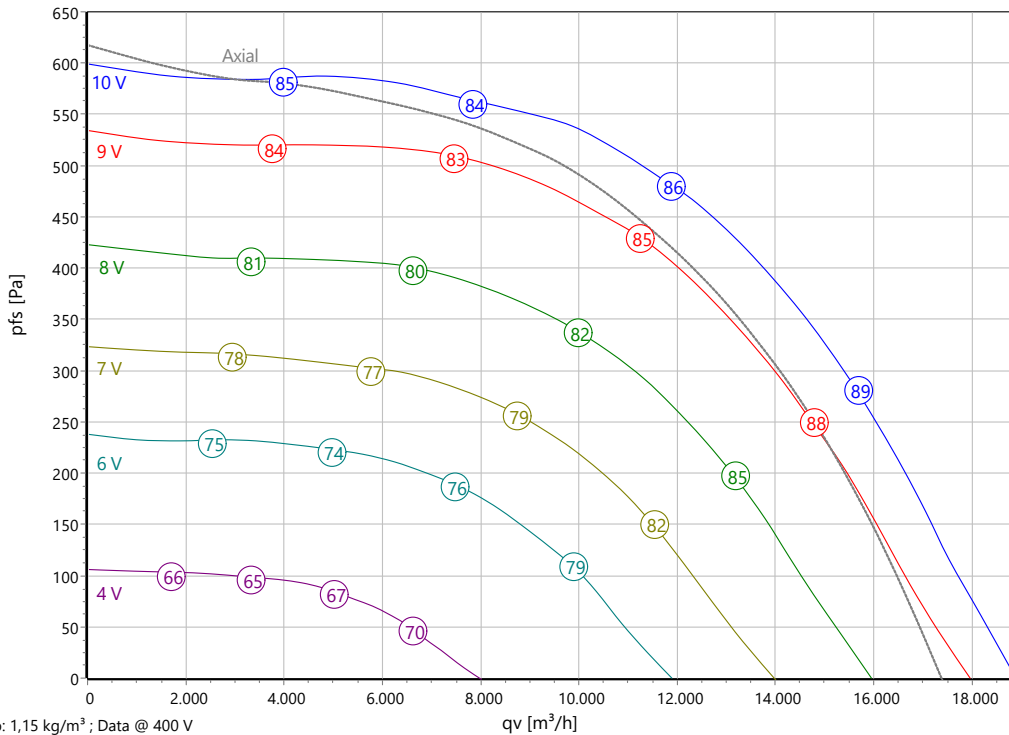

p: 1,15 kg/m³ ; Data @ 400 V

**ErP-Data:**

(EU) Nr. 1253/2014	(Lot6)
q <sub>v</sub>	12733 m³/h
p <sub>fs</sub>	449 Pa
η <sub>fs</sub>	59,9 %
P <sub>ed</sub>	2,66 kW
n	940 r/min
N	54
v	2,18 m/s
η <sub>fs</sub> Lot11	62,9 %

**Nominal Data:**

U [V]	f [Hz]	Data @ [V]	P <sub>ed</sub> [kW]	I <sub>N</sub> [A]	n <sub>N</sub> [r/min]	t <sub>R</sub> [°C]	k <sub>10</sub> [m²/s/h]	Eff.-Rating	IP	m [kg]
3~380-480	50/60	400	2,66	4,13	940	-25 .. +60	408	IE5	IP 54	121

**Sound Data:**

Frequency	Σ		125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Distances	1 m	4 m
LwA(A,in) [dB(A)]	-3	-	-16	-12	-10	-8	-10	-15	-17	LpA(A,in) [dB(A)]	-10	-20
LwA(A,out) [dB(A)]		-	-15	-9	-7	-4	-8	-13	-14	LpA(A,out) [dB(A)]	-7	-17
LwA(D,cas) [dB(A)]	-14	-	-18	-19	-24	-25	-26	-30	-32	LpA(D,cas) [dB(A)]	-21	-31


performance curve at radial air flow



Type: **UNO 102-710-G.6NA Gen3**

Open-loop control, 0-10 Volt

Part no.: F15-71014

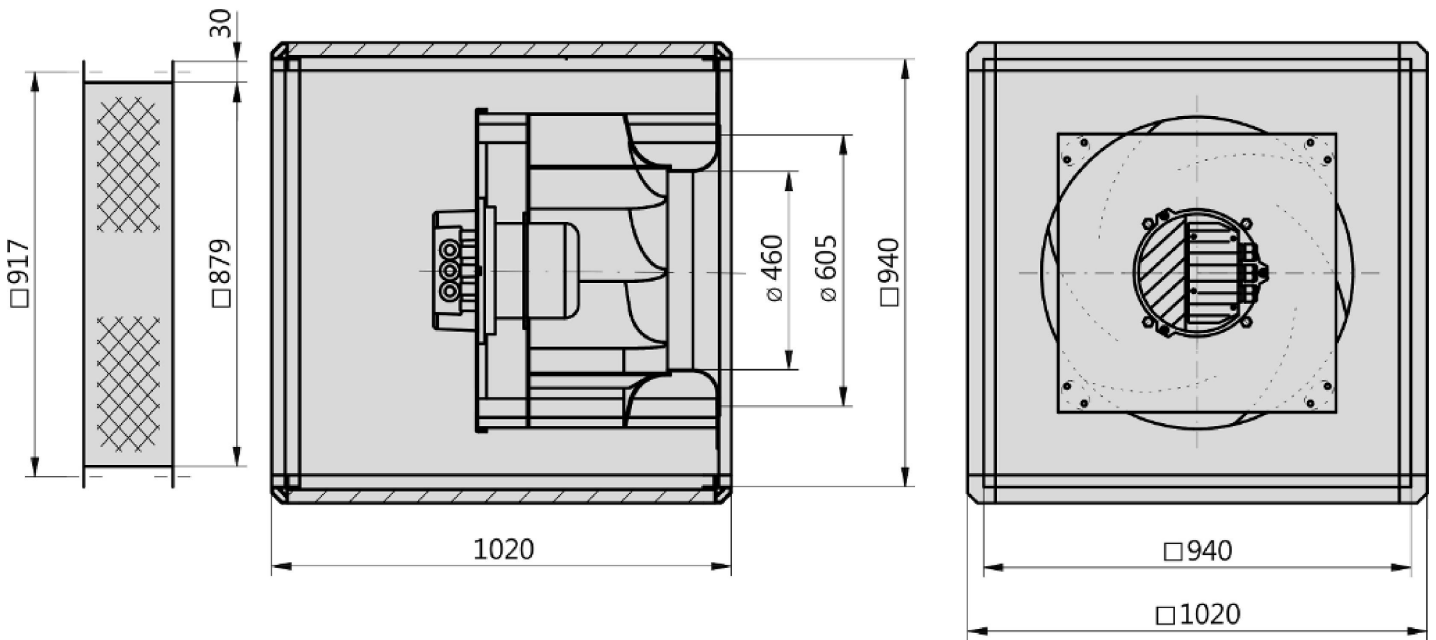




Type: **UNO 102-710-G.6NA Gen3**

Open-loop control, 0-10 Volt

Part no.: F15-71014

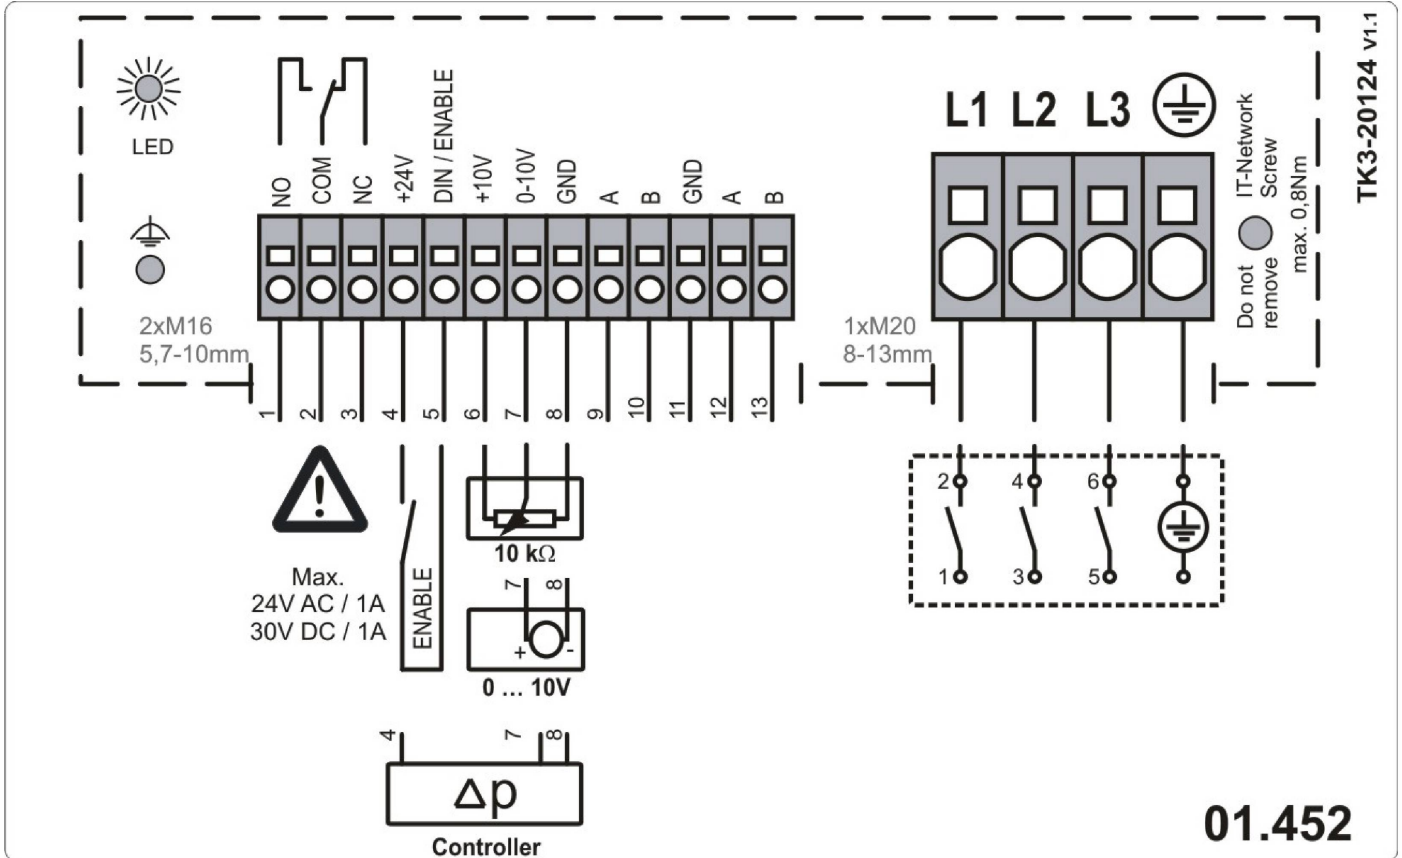

### Unobox

Boxfan with flexible outlet

The housing supporting frames are double chamber aluminium profiles with corners made of plastic and double skinned galvanized steel panels insulated with non-inflammable, noise and temperature insulating fiberglass mats. One side of the casing is open as standard. Wall thickness 20mm,  $K=1,25 \text{ W/m}^2\text{K}$ . As standard, the casing is open opposite to the inlet side. The removable side panels ensure highest possible flexibility of the air flow direction at the installation site. Impeller made of aluminum (AlMg3) with 8 backward curved blades. Compact and flexible design. Energy saving EC external-rotor motor of the 3rd generation. Exceeds in accordance with IEC 60034 -30-2 minimum requirements for IE5 (Ultra Premium Efficiency). Maintenance free ball bearings, closed on both sides with long-term lubrication. Magnets without rare earth elements. Motor made of die casted aluminum. Protection Class IP54 and insulation class F. Electronic with integrated terminal box and environmental resistant cable glands (2x M16 and 1x M20). Status LED integrated. 100% speed controllable with integrated Motor Protection and Soft Start. ModBus RTU Interface integrated. Busconfiguration possible on site by customer. Potential-free Alarm Contact and integrated 24V Supply for accessories. Applicable in all common energy grids and IT-Network. Low noise commutation. Motorized Impeller statically and dynamically balanced according to DIN ISO 21940 -11 at least with quality level G6.3. Air volume control is possible over an 0-10V Signal (accessory).

Fan complies with the guidelines required (Machinery -, EMC- and Low Voltage Directive) to comply with installation and conformity declaration as well as CE marking.

### Nominal Data:

Voltage

3~380-480 V

Frequency

50/60 Hz

Input power

2,66 kW

Current

4,13 A

Speed

940 r/min

Medium temperature

60 °C

Protection Mode

IP 54

Efficiency Class

IE5

K-Factor

408

Weight

121 kg

Dimensions

1020 mm / 1020 mm / 1020 mm

### Contact:

Rosenberg Ventilatoren BV

Elandlaan 8

NL - 3734 CP Den Dolder

<http://www.rosenberg.nl>

**Type:**

UNO 102-710-G.6NA Gen3

**Article-No.:**

F15-71014

---